




Meter Disconnect Combo


MEG Approved & NEC 2020 Compliant



U6419

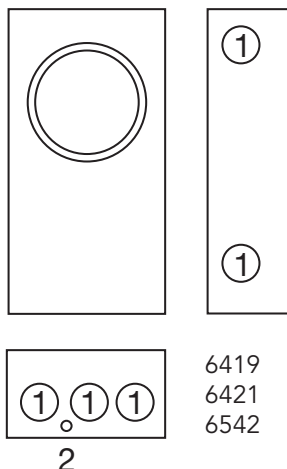

6419
6421
6542

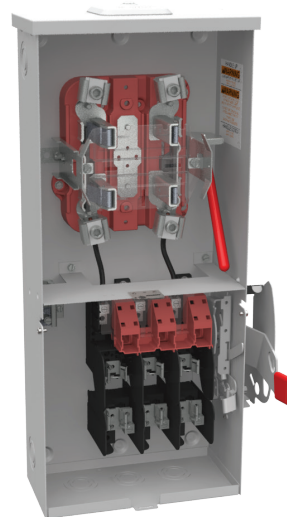

U6542

60 Amps | 4 Terminal | Non-Fused | Ringless | Single Position | 1Ø3W

Catalog Number	Material	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts	
						D"	W"	H"	1	2
U6419-XL-HSP	Steel	OH	C.P.	#6-350	None	4 ¹⁹ / ₃₂	8	16	1 ¹ / ₄	¹ / ₄
U6421-XL-HSP	Steel	OH/UG	C.P.	#6-350	Lever	4 ²⁷ / ₃₂	10	19 ³ / ₈	1 ¹ / ₄	¹ / ₄

60 Amps | 5 Terminal | Fused | Ringless | Lever Bypass | Single Position | 1Ø3W

Catalog Number	Material	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts		
						D"	W"	H"	1	2	3
U6542-RL-5T9-HSP	Steel	OH/UG	H.O.	#6-350	Lever	4 ⁷ / ₈	10	23 ³ / ₈	3	1 ¹ / ₄	¹ / ₄
UA6542-RL-5T9-HSP	Aluminum	OH/UG	H.O.	#6-350	Lever	4 ⁷ / ₈	10	23 ³ / ₈	3	1 ¹ / ₄	¹ / ₄
UAP6542-RL-5T9-HSP	Aluminum	OH/UG	H.O.	#6-350	Lever	4 ⁷ / ₈	10	23 ³ / ₈	3	1 ¹ / ₄	¹ / ₄
USS6542-RL-5T9-HSP	Stainless Steel	OH/UG	Blank	#6-350	Lever	4 ⁷ / ₈	10	23 ³ / ₈	3	1 ¹ / ₄	¹ / ₄
USSP6542-O-5T9-HSP	Stainless Steel	OH/UG	Blank	#6-350	Lever	4 ⁷ / ₈	10	23 ³ / ₈	3	1 ¹ / ₄	¹ / ₄

Notes

- NEMA 3R rated
- Powder-coated galvanized steel, aluminum, or stainless steel
- SCCR Rating of 10K




Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





Meter Mains

100-200 Amps | 4 Terminal | Ringless | 120/240

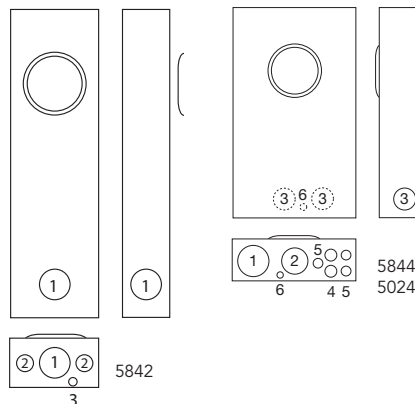

U5842-RL-150-HSP

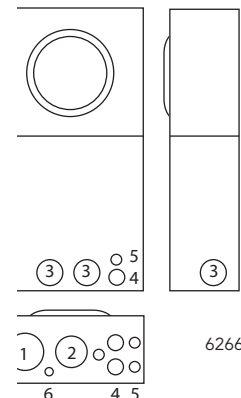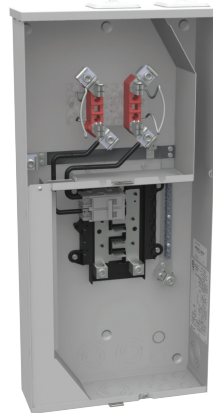

U6266-XTL-100-HSP

100-200 Amps | 4 Terminal | Ringless | Meter Main | 1Ø3W

Catalog Number	Material	Service	Hub	Connectors CU/AL - Line		Dimensions			Knockouts					
				Line	Load	D"	W"	H"	1	2	3	4	5	6
U5842-RL-100-HSP	Steel	OH	C.P.	#6-350	CB	4½	8	30	2	1¼	¼	—	—	—
U5842-RL-150-HSP	Steel	OH	C.P.	#6-350	CB	4½	8	30	2	1¼	¼	—	—	—
U5842-RL-200-HSP	Steel	OH	C.P.	#6-350	CB	4½	8	30	2	1¼	¼	—	—	—
U5844-RL-100-HSP	Steel	OH/UG	H.O.	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
U5844-RL-150-HSP	Steel	OH/UG	H.O.	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
U5844-RL-200-HSP	Steel	OH/UG	H.O.	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
UAP5844-RL-100-HSP	Aluminum	OH/UG	H.O.	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
UAP5844-RL-150-HSP	Aluminum	OH/UG	H.O.	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
UAP5844-RL-200-HSP	Aluminum	OH/UG	H.O.	#6-350	CB	4½	14	30	3	2½	2	1	¾	½

100-200 Amps | 4 Terminal | Ringless | Meter Main with Load Center | 1Ø3W

Catalog Number	Breaker Amps	Circuits	Material	Service	Hub	Connectors CU/AL - Line		Dimensions			Knockouts					
						Line	Load	D"	W"	H"	1	2	3	4	5	6
U6266-XTL-100-HSP	100	10	Steel	OH/UG	(2) C.P.	#6-350	CB	4½	14⅞	30	3	2½	2	½	¾	½
U6266-XTL-150-HSP	150	8	Steel	OH/UG	(2) C.P.	#6-350	CB	4½	14⅞	30	3	2½	2	½	¾	½
U6266-XTL-200-HSP	200	8	Steel	OH/UG	(2) C.P.	#6-350	CB	4½	14⅞	30	3	2½	2	½	¾	½


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





Meter Main & Meter Main w/ Load Center


320 Amps | 4 Terminal | Ringless | 120/240 VAC

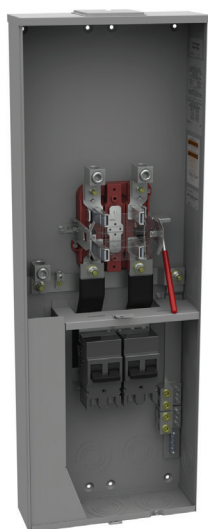


U6267-X-2/200-HSP



U6601-X-2/200-5T9-HSP



UAP6602-X-2/200-5T9-MLK-HSP



320 Amps | 4 Terminal | Ringless | Meter Main | 1Ø3W | Lever Bypass

Catalog Number	Material	Main Breaker	Service	Hub	Connectors CU/AL - Line		Dimensions			Knockouts			
					Line	Load	D"	W"	H"	1	2	3	4
U6267-X-2/100-HSP	Steel	2/100	OH/UG	C.P.	3/8" x 16 Studs	—	6	15	42½	4	2½	5/16	—
U6267-X-2/150-HSP	Steel	2/150	OH/UG	C.P.	3/8" x 16 Studs	CB	6	15	42½	4	2½	5/16	—
U6267-X-2/200-HSP	Steel	2/200	OH/UG	C.P.	3/8" x 16 Studs	CB	6	15	42½	4	2½	5/16	—
U6601-X-2/200-5T9-HSP	Steel	2/200	OH/UG	C.P.	3/8" x 16 Studs	CB	6	34¼	35	4	2½	1/2	5/16
UAP6601-X-2/200-5T9-HSP	Aluminum	2/200	OH/UG	C.P.	3/8" x 16 Studs	CB	6	34¼	35	4	2½	1/2	5/16
UAP6601-X-2/200-5T9-MLK-HSP	Aluminum	2/200	OH/UG	C.P.	3/8" x 16 Studs	CB	6	34¼	35	4	2½	1/2	5/16

320 Amps | 4 Terminal | Ringless | Meter Main w/ Load Center | 1Ø3W | Lever Bypass

Catalog Number	Material	Main Breaker	Load Center	Service	Hub	Connectors CU/AL - Line		Dimensions			Knockouts				
						Line	Load	D"	W"	H"	1	2	3	4	5
U6602-X-2/200-5T9-MLK-HSP	Steel	2/200	12	OH/UG	C.P.	3/8" x 16 Studs	CB	6	38	41	4	2½	3/4	1	1/2

Notes

- **HSP:** Has a stainless steel hasp
- **Short Circuit Current Withstand Rating:** 22K AIC standard.
- **Breakers:** Units come with main breakers.
- **Fifth Terminal:** For field mounted fifth terminal order catalog number **K3865**.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.






Meter Socket with Main


400 Amps | 4 & 7 Terminals | Ringless | 480 VAC



U6227-X-400-K3L

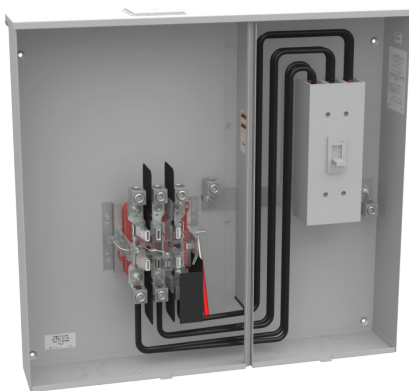

U6229-X-400-K7L

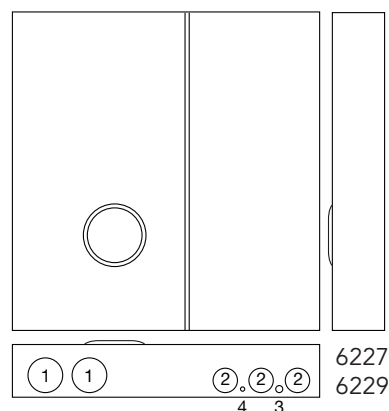

400 Amps Meter Main | 4 Terminal | 1Ø3W | Ringless | 480 VAC

Catalog Number	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
			Line	D"	W"	H"	1	2	3	4
U6227-X-400-K3L-HSP	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼

400 Amps Meter Main | 7 Terminal | 3Ø4W | 480 VAC

Catalog Number	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
			Line	D"	W"	H"	1	2	3	4
U6229-X-400-K7L-HSP	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼

Specifications

- AIC Rating: **22K AIC at 240V.** And 10K AIC at **480V**
- 300 Amps breaker: **U6227 and U6229 only** can be installed from the factory (upon request)

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





Multi-Position Meter Mains

125 Amps | 4 Terminal | Ringless | 120/240 VAC | 22K AIC



U5882-X-HSP



U5884-X-HSP

Rating kAIC	Circuit Breaker 125A
10	SIEMENS: QP CUTLER-HAMMER: BR, HQP, QHP, QPGF SQUARE D: HOMELINE G.E.: (50AMP.MAX.) THQL, THQL-GF
22	SIEMENS: QPH
	150-200 AMPS
10	SIEMENS: QN
22	SIEMENS: QNH

125 Amps per Position | 4 Terminal | Multi-Position Meter Main | Ringless

Catalog Number	Amps	Positions	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Weight (lbs.)
					Line		D"	W"	H"	
U5902-X-HSP	125	2	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	26 1/2"	30"	58
U5903-X-HSP	125	3	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	34 5/8"	30"	88
U5904-X-HSP	125	4	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	42 5/8"	30"	107
U5905-X-HSP	125	5	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	51 1/20"	30"	128
U5906-X-HSP	125	6	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	59 3/10"	30"	146

200 Amps per Position | 4 Terminal | Multi Position Meter Main | Ringless

Catalog Number	Amps	Positions	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Weight (lbs.)
					Line		D"	W"	H"	
U5882-X-HSP	200	2	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	26 1/2"	30"	58
U5883-X-HSP	200	3	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	34 5/8"	30"	88
U5884-X-HSP	200	4	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	42 5/8"	30"	107
U5885-X-HSP	200	5	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	51 1/20"	30"	128
U5886-X-HSP	200	6	OH/UG	C.P.	3/8" x 16 Stud	Horn	5 1/8"	59 3/10"	30"	146

Notes

- **Knockouts:** See drawings on the next page.
- **Optional:** Factory installed breakers are available - consult factory.
- **AIC Rating:** All models are rated **22K AIC** when used with approved breakers rated at 22K.
- **Hub:** Units supplied with one closing plate. Order hubs separately, see accessories page.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Connectors:** Socket is supplied with 3/8" - 16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on the accessories page. Separate lug kits are required for line and load.






Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Multi-Position Meter Mains

Dimensional Information

Knockouts				
1	2	3	4	5
3	2½	1	7/8	¼

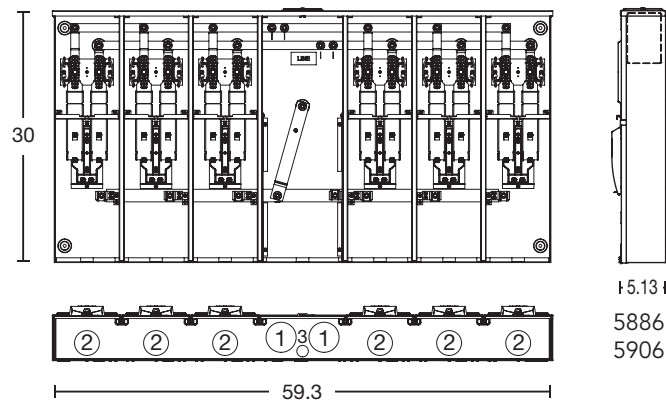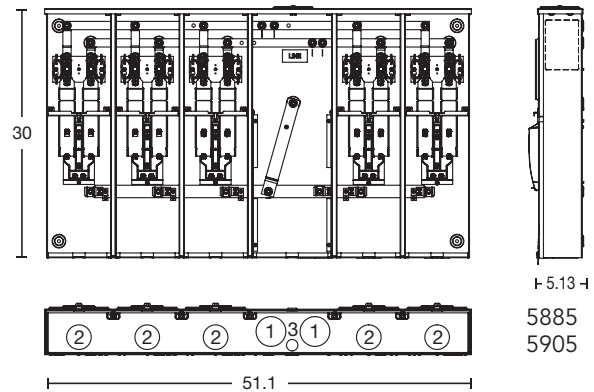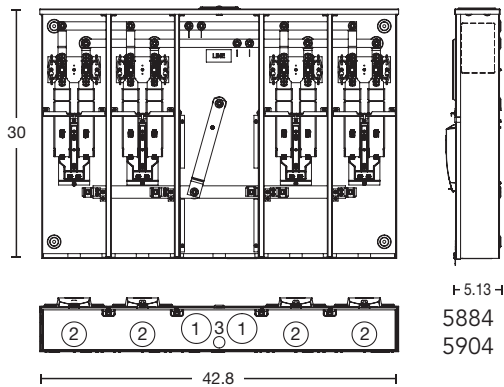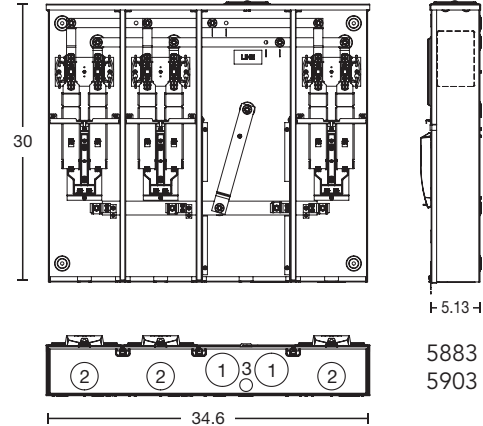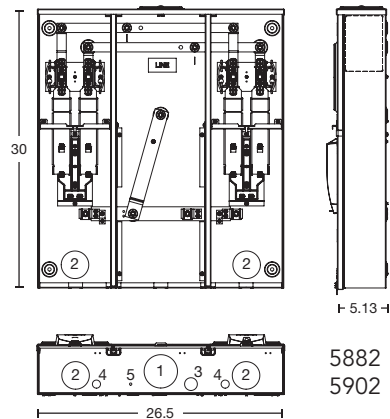

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Meter Main with Load Center Pedestal

100–200 Amps | 4 Terminal | Ringless | 120/240 VAC



U5136-O-100S-FMG

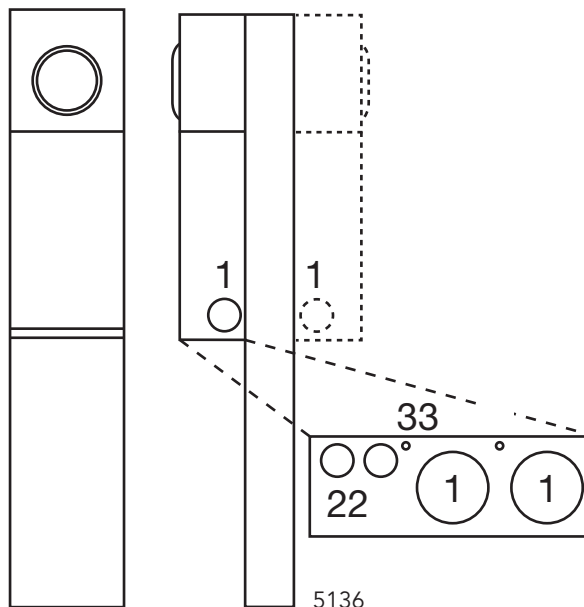

100–200 Amps | Meter Main with Load Center Pedestal | Ringless

Catalog Number	Powerheads	Amps	Main Breaker	Interior	Dimensions			Knockouts		
					D"	W"	H"	1	2	3
U5136-O-FMG	Single	—	Breaker provision	4 circuit	10¼	10	80	2	½, ¾	¼
U5136-O-100S-FMG	Single	100	UQFP-M-100 (Series)	4 circuit	10¼	10	80	2	½, ¾	¼
U5136-O-125S-FMG	Single	125	UQFP-M-125 (Series)	4 circuit	10¼	10	80	2	½, ¾	¼
U5136-O-150S-FMG	Single	150	UQFP-M-150 (Series)	4 circuit	10¼	10	80	2	½, ¾	¼
U5136-O-200S-FMG	Single	200	UQFP-M-200 (Series)	4 circuit	10¼	10	80	2	½, ¾	¼
U5136-O-100P-FMG	Single	100	UQFP-M-100 (Parallel)	4 circuit	10¼	10	80	2	½, ¾	¼
U5136-O-125P-FMG	Single	125	UQFP-M-100 (Parallel)	4 circuit	10¼	10	80	2	½, ¾	¼
U5136-O-150P-FMG	Single	150	UQFP-M-100 (Parallel)	4 circuit	10¼	10	80	2	½, ¾	¼
U5136-O-200P-FMG	Single	200	UQFP-M-100 (Parallel)	4 circuit	10¼	10	80	2	½, ¾	¼

Notes

- **Parallel to Series Conversion:** For field converting from parallel wired to series wired order **K5194**.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Receptacles:** Consult factory for installed receptacle assemblies.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

